





Specifications variable OBC

Optical Business Card - REPLICATION

Print specifications for the delivery of artwork files

Object: OBC (Optical Business Card) **variable**
Printable Format (blue / without bleed): *variable* x 77 mm
Final Disc Format: *variable* x 80 mm
Inner Ring: Ø = 21 mm (middle hole)
Capacity: 32-100 MB

Object: 30 MB OBC (Optical Business Card)
Printable Format (blue / without bleed): 83 x 56 mm
Final Disc Format: 85 x 58 mm
Inner Ring: Ø = 21 mm (middle hole)
Capacity: 30 MB

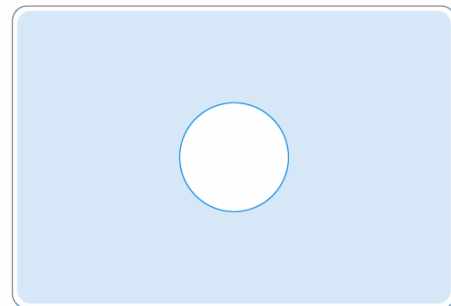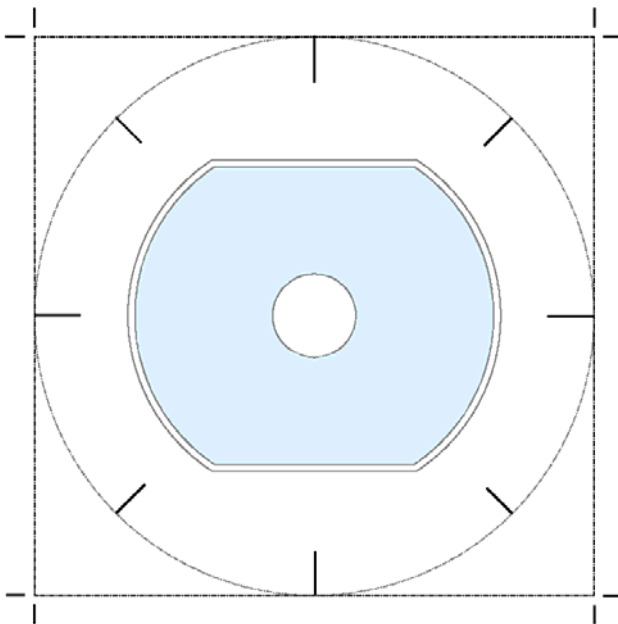

Print Material:

1. Silk-Screen Print

Coloring: 5-colors-Euroscale,
special colors in Pantone und HKS

2. Offset-Print

Coloring: 5-fbg. Euroskala
Extras: gloss paint possible

Details

Print specifications for the delivery of artwork files

We require from you a color proof in the ratio 1:1.
Should no proof be delivered to us, we will fall back on standard printing procedures.

The middle hole must definitely be left open! Please make sure to place the white film exacty on the back surface.

Please be aware that color fading may occur on the CD surface during the printing process.

Data requirements for the printing screen:

Color capability: 1-6 colors, Pantone, HKS, 4-colored screen printing.
Screen 48 lines/cent (48er grid), elliptical grid point

- Special colors given in Pantone or HKS
- min. light 15%
- max. depth 85%
- right-sided, surfac up

All font sizes should be larger than

- in positive print 5 pt. = 1,75 mm
- in negative print 7 pt. = 2,1 mm

Line thickness should be larger than:

- in positive print 0,15 mm
- in negative print 0,25 mm

Attention: Please note that silk-screen print across from the offset print cannot be enlarged. In the silk-screen print the colors will always be more shiny and brilliant than in offset print.

Printingstandards for Offset-Print:

Color capabilities: 6 colors: 1st color: white, 2nd-5th color: 4-color Euroscale Screen Print, 6th color: partial gloss paint or special color

There can only be one special color applied after Pantone or HKDS, but there will be no gloss paint!

Offset Print 60lines/cent (60 grid), elliptical grid point

All lines thickness should be at least

- in positive print min. 0,08 mm
- in negative print min. 0,10 mm